

Wireless Temperature and Humidity Sensor with Thermocouple Sensor - Type T

Wireless Sensor Network Based on LoRa Technology



R718CTAB Datasheet

Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology. It shall be maintained in strict confidence and shall not be disclosed to other parties, in whole or in part, without written permission of NETVOX Technology. The specifications are subject to change without prior notice.

Wireless Temperature and Humidity Sensor with Thermocouple Sensor - Type T

Introduction

The device connects a temperature/humidity sensor and T-Type thermocouple, which respectively detects temperature/humidity and the surface temperature of an object.

Features

- SX1276 wireless communication module
- 2 ER14505 batteries AA size in parallel
- IP65 (main body); IP67 (T-type thermocouple)
- Magnetic base
- Thermocouple detection
- Compatible with LoRaWAN Class A device
- Frequency-hopping spread spectrum
- Support third-party platforms: Actility/ThingPark, TTN, MyDevices/Cayenne
- Low-power design for longer battery life

Note:


Please visit http://www.netvox.com.tw/electric/electric_calc.html for battery life calculation and other detailed information.

Applications

- Object Temperature Measuring
- Environment Temperature/Humidity Measuring
- Thermal System Equipment

Wireless Temperature and Humidity Sensor with Thermocouple Sensor - Type T

Dimensions

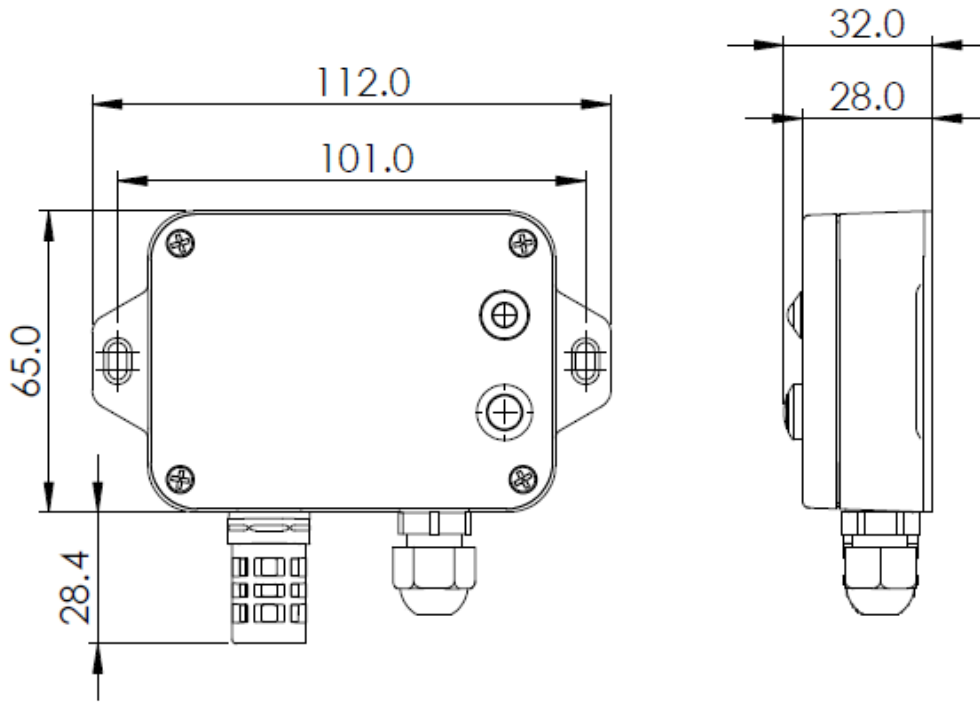

Electrical Specifications

Input Power	2 ER14505 AA size lithium batteries (3.6V 2400mah for each one)
Operating Voltage	3.1V to 3.65V
Battery Life	4.8 years (under the conditions: ambient temperature 25°C; report every 15 mins; Txpower = 20dBm; LoRa spreading factor SF = 10)
Standby Current	35uA
Wakeup Current	Typical value: 7.33mA; Wakeup current: 0.8mA–20mA (without transmitting and receiving data)
Battery Low Voltage Threshold	3.2V
Battery Measurement Accuracy	±0.1V

Wireless Temperature and Humidity Sensor with Thermocouple Sensor - Type T
Module-R100H

Wake-up Current	(0.8mA–8mA) @3.3V
Receiving Current (max)	11mA @3.3V
Transmitting Current (max)	120mA @3.3V

Note: Electrical specifications may vary depending on the power supply voltage.

Frequency

Frequency Range	863MHz–928MHz 470MHz–510MHz
Tx Power	US915 20dbm AS923 16dbm AU915 20dbm CN470 19.15dbm EU868 16dbm KR920 14dbm IN865 20dbm
Rx Sensitivity	-136dBm (LoRa, Spreading Factor = 12, Bit Rate = 293bps) -121dBm (FSK, Frequency deviation = 5kHz, Bit Rate = 1.2kbps)
Antenna Type	Build-in antenna
Communication Range	10km (line of sight) Note: Actual communication range may vary due to the environment.
Data Transfer Rate	0.3kbps–50kbps (LoRaWAN); 1.2kbps–300kbps (FSK)
Modulation Method	LoRa/FSK (Note: One modulation method is required.)
Supportable LoRaWAN Frequency	EU863-870, US902-928, AU915-928, KR920-923, AS923-1, AS923-2, AS923-3, IN865-867, CN470-510 (Note: optional, to be done in the factory configuration)

Wireless Temperature and Humidity Sensor with Thermocouple Sensor - Type T

Temperature/Humidity Sensor

Temperature Measurement Range	-20°C–55°C
Temperature Measurement Accuracy	±0.8°C
Humidity Measurement Range	0% RH–100% RH
Humidity Measurement Accuracy	±4% RH

Type T Thermocouple

Measurement Accuracy	<p>1. Temperature range of T-type thermocouple: $-40^{\circ}\text{C} \leq t \leq 125^{\circ}\text{C}$</p> <p>2. Temperature measurement accuracy:</p> <p>A. When the main body and T-type thermocouple are in the same temperature range: Temperature Range: $0^{\circ}\text{C} \leq t \leq 55^{\circ}\text{C}$, Accuracy: $\pm 0.8^{\circ}\text{C}$</p> <p>B. When the main body and T-type thermocouple are in different temperature ranges: Temperature Range: $0^{\circ}\text{C} \leq T1 \leq 55^{\circ}\text{C}$ (Main body) Temperature Range: $-40^{\circ}\text{C} \leq T2 < 0^{\circ}\text{C}$ (Sensor) Accuracy: $\pm 2^{\circ}\text{C}$</p> <p>Temperature Range: $0^{\circ}\text{C} \leq T1 \leq 55^{\circ}\text{C}$ (Main body) Temperature Range: $55^{\circ}\text{C} < T2 \leq 375^{\circ}\text{C}$ (Sensor) Accuracy: $\pm 1.5^{\circ}\text{C}$</p> <p>* t, T1, and T2 refer to temperature</p>
Thermocouple Wire Length	1m
Thermocouple Probe Dimension	Ø5mm x 30mm

Wireless Temperature and Humidity Sensor with Thermocouple Sensor - Type T

Physical Properties

Dimensions	112mm (L) x 93.4mm (W) x 32mm (H)
Environment Temperature Range	-20°C–55°C
Environment Humidity Range	<90%RH (No condensation)
Storage Temperature	-40°C–85°C