

Wireless 2-Input 0-10V ADC Sampling Interface

Wireless Sensor Network Based on LoRa Technology



R718IB2

Data Sheet

Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology.

The specifications are subjected to change without prior notice.

Wireless 2-Input 0-10V ADC Sampling Interface

Introduction

The device can be connected to 2-input ADC sampling interfaces. As the figure, black line is the ground line, and red line is the ADC sampling interface line. The ADC sampling voltage range is 0-10V. It adopts SX1276 wireless communication module.

Operating Principle

The external input ADC samples the signal (0-10v), and the module performs ADC sampling processing on the signal.

Main characteristic

- Adopt SX1276 wireless communication module
- 2 sections of ER14505 battery in parallel (AA SIZE 3.6V / section)
- 2-Input ADC Sampling Interfaces
- Protection level IP65/ IP67 (optional)
- The base is attached with a magnet that can be attached to a ferromagnetic material object
- Compatible with LoRaWAN™ Class A
- Frequency hopping spread spectrum technology
- Configuring parameters and reading data via third-party software platforms, and set alarms via SMS text and email (optional)
- Applicable to third-party platforms: Actility / ThingPark, TTN, MyDevices / Cayenne
- Low power consumption and long battery life

Note*:


Battery life is determined by the sensor reporting frequency and other variables, please refer to http://www.netvox.com.tw/electric/electric_calc.html

On this website, users can find battery life of various models in different configurations.

Application

- ADC sampling interface device (0-10V)

Wireless 2-Input 0-10V ADC Sampling Interface

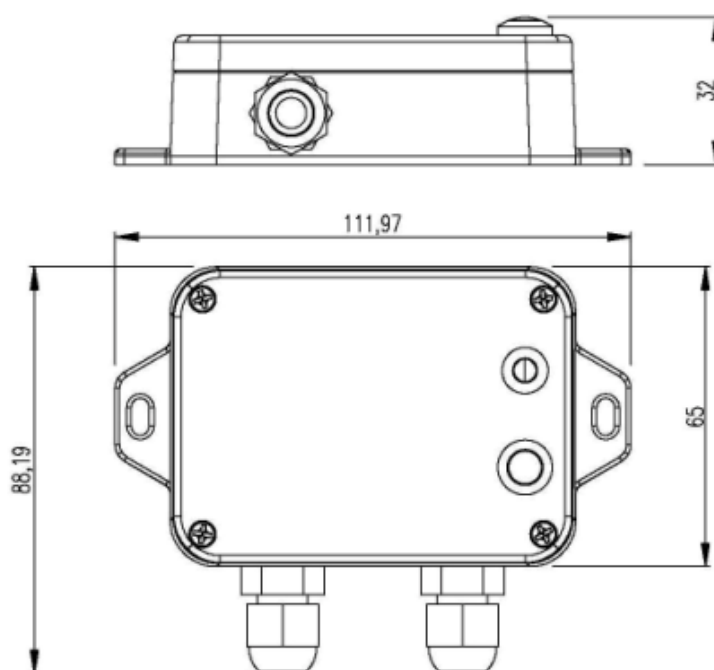Dimension

Electric

Power Supply	2 x ER14505 AA lithium batteries (3.6V 2400mah/section) Specific specifications are subject to actual shipment.
Battery Life	5 years (Conditions: ambient temperature 25 °C, 15 min report once, TX power = 20dBm, LoRa spreading factor SF = 10)
Standby Current	27uA
Wakeup Current	Wakeup current range 0.8mA-20 mA * When not transmitting /receiving LoRa data
Low Voltage Threshold	3.2V
Battery Measurement Accuracy	±0.1V

Module-R100H

Wake-up Current	0.8mA - 8mA@3.3V
RF Receiving Current (max)	11mA/3.3V
RF Transmitting Current (max)	120mA/3.3V

*Specific electrical characteristics will vary depending on the power supply voltage.

Wireless 2-Input 0-10V ADC Sampling Interface

Frequency

Frequency Range	863MHz-928MHz 470MHz-510MHz
TX Power	US915 20dbm AS923 16dbm AU915 20dbm CN470 19.15dbm EU868 16dbm KR920 14dbm IN865 20dbm
Receiving Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate = 293bps) -121 dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Built-in antenna
Communication Distance	Up to 10 km (visible linear obstacle-free transmission distance, actual transmission distance depends on the environment)
Data Transfer Rate	0.3kbps to 50kbps
Modulation System Mode	LoRa/FSK (Note: choose one of them)
Supportable LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923, CN470-510 (Note: The frequency band is optional and needs to be configured before shipment)

ADC Sampling

ADC Sampling Voltage Range	0-10V
ADC Resolution	12 digits
ADC Conversion Rate	1.14 Msps
ADC Sampling Cable Length	1m
ADC Sampling Offset	0.6mv (theoretical value)


Physical

Dimension	L: 112 mm*W: 88.19 mm*H: 32 mm
Host Body Weight	About 150g
Ambient Temperature Range	-20 °C to 55°C
Ambient Humidity Range	<90% RH (no condensation)
Storage Temperature Range	-40 °C to 85°C

Wireless 2-Input 0-10V ADC Sampling Interface

Example Diagram of R718IB2

A. 2-wire (for wiring reference)

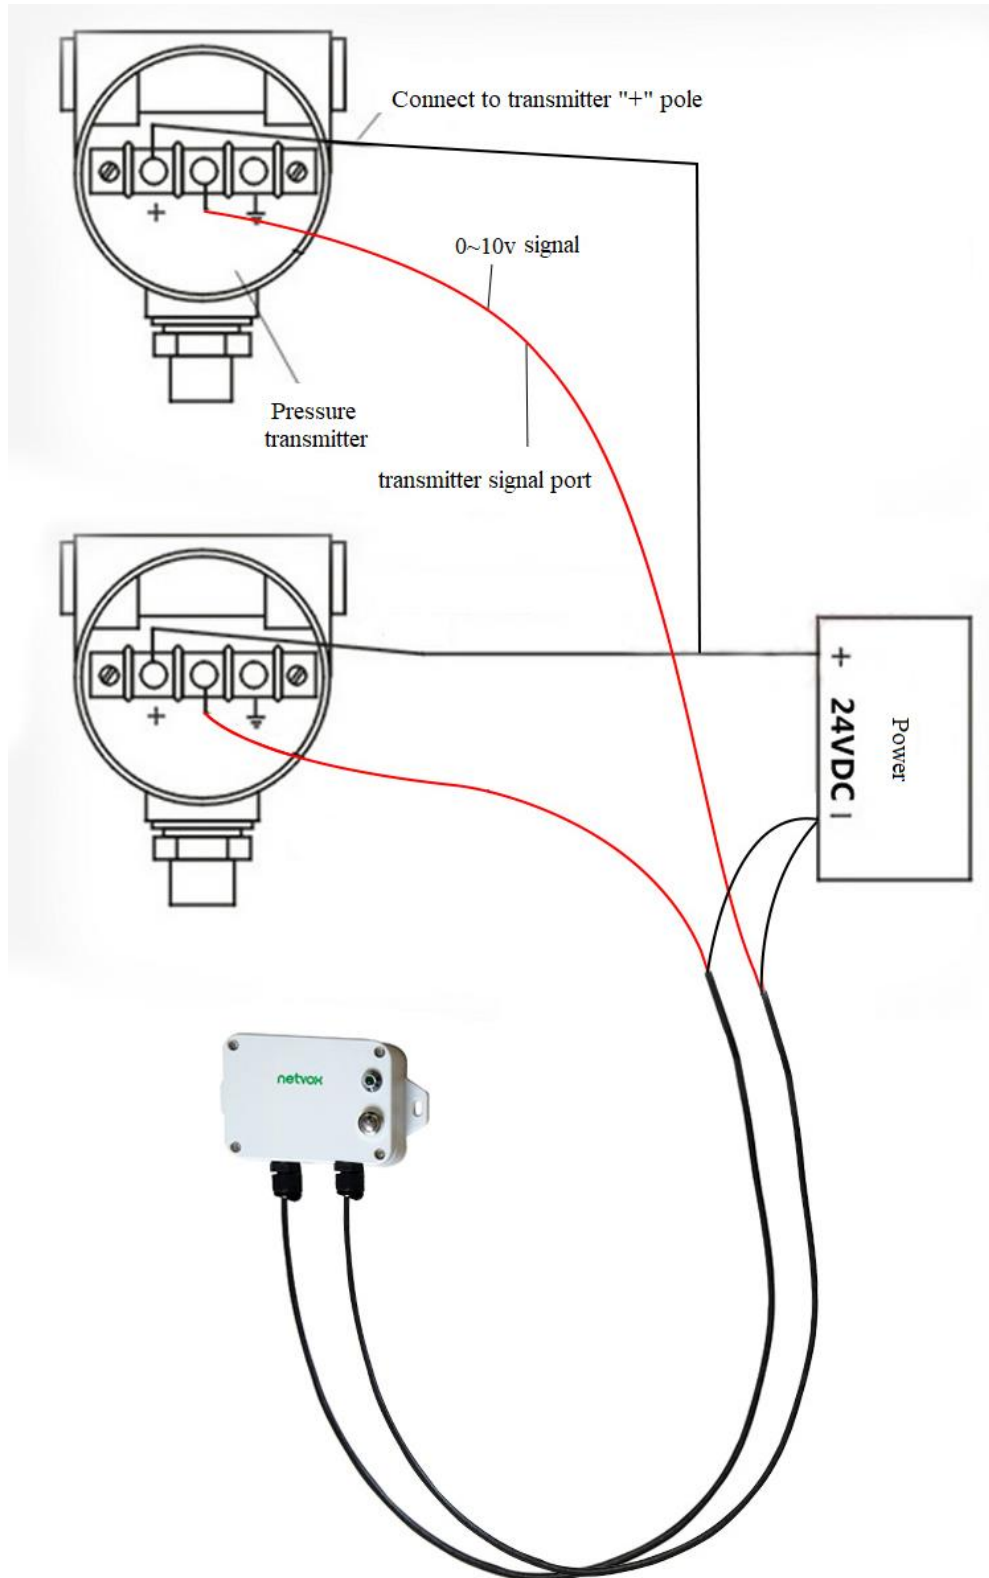

Wireless 2-Input 0-10V ADC Sampling Interface

B. 3-wire (for wiring reference)

