

Wireless Single-Phase Current Meter with 1 x 150A Clamp-On CT

Wireless Sensor Network Based on LoRa Technology

R718N115D(E) DataSheet



R718N115D

R718N115DE

(with detachable cable)

Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology. The specifications are subjected to change without prior notice.

Wireless Single-Phase Current Meter with 1 x 150A Clamp-On CT (DC-powered)

Introduction

The NETVOX wireless single-phase current meter is used to detect single-phase electrical input current. The device is compatible with the LoRaWAN protocol and integrates a chip module that conforms to the LoRaWAN wireless protocol to display the collected data in the gateway. The device obtains the load AC current value through the current transformer, which can be conveniently connected to the measured device.

Working Principle

Current transformer is an instrument that converts the primary side large current into a secondary side small current according to the principle of electromagnetic induction. The primary side large current is isolated from the secondary side small current, and the secondary side of the device is monitored. Low current, battery-powered, to ensure safe use of the device.

Features

- Clamp-on current transformer (with detachable cable)
- DC power supply (input: AC 100V to 240V 50/60Hz; output: DC 3.3V/1A)
- IP30 main body and sensor
- Magnetic base
- LoRaWAN™ Class C compatible
- SX1276 wireless communication module
- Frequency-hopping spread spectrum (FHSS)
- Available third-party platforms: Actility/ThingPark, TTN, MyDevices/Cayenne


Applications

- Indoor current measurement for homes, hotels, office buildings, shopping malls, etc.
- Smart city
- Thermal system equipment


Wireless Single-Phase Current Meter with 1 x 150A Clamp-On CT (DC-powered)

Dimensions

Main body: 112mm (L) x 88.19mm (W) x 32mm (H)

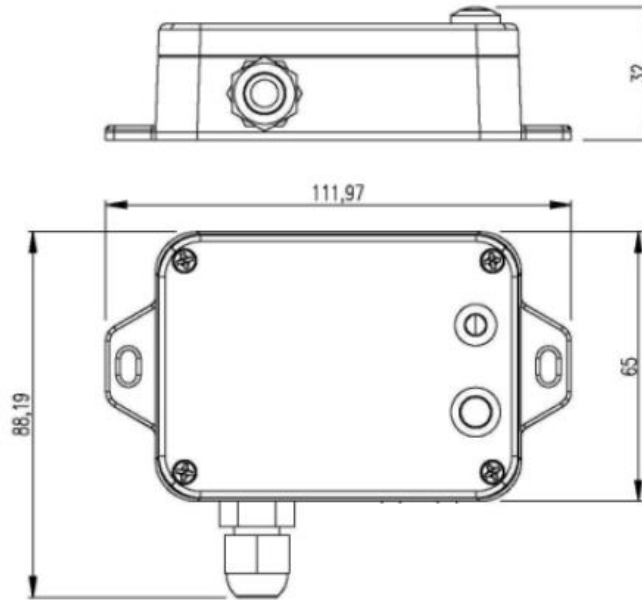

CT: 33mm (L) x 28.5mm (W) x 43.5mm (H)

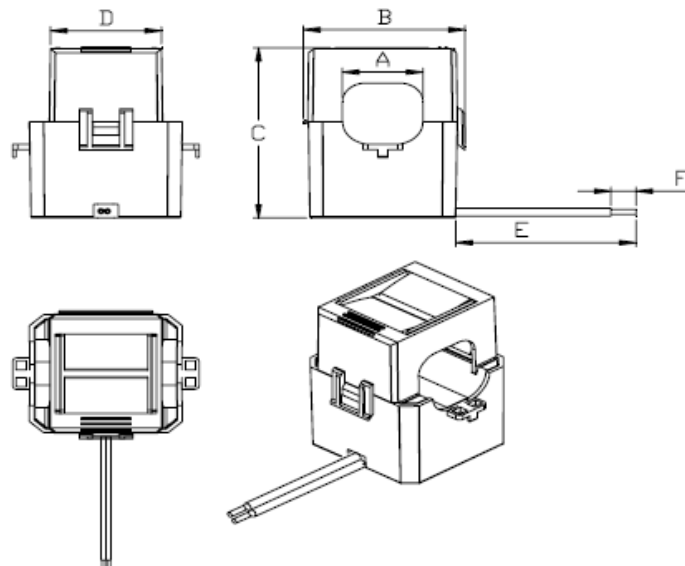

A	B	C	D	E	F
16±0.5	33±0.5	43.5±0.5	22.8±0.3	900±30	6±1

Wireless Single-Phase Current Meter with 1 x 150A Clamp-On CT (DC-powered)

Electrical Specifications

Power Supply	DC 3.3V/1A
Power Consumption	≤ 0.5W
RF Receiving Current	11mA / 3.3V
RF Emission Current	120mA / 3.3 V
Current Measurement Accuracy	< ± 1%
Current Resolution	1mA
Current Measurement Range	1A to 150A

Note: The electrical specifications may vary due to the voltage of power supply.

Frequency

Frequency Range	863MHz-928MHz 470MHz-510MHz
Power Output	19dBm±1dBm (max)
Tx Power	US915 20dBm AS923 16dBm AU915 20dBm CN470 19.15dBm EU868 16dBm KR920 14dBm IN865 20dBm
Rx Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate=293bps) -121dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Built-in antenna
Communication Range	10km (line of sight) Note: Actual transmission distance may vary due to the environment.
Data Transfer Rate	Lora: 0.3 – 50kbps; FSK: 1.2 – 300kbps
Modulation	LoRa/FSK Note: One modulation method is required.

Wireless Single-Phase Current Meter with 1 x 150A Clamp-On CT (DC-powered)

Available LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923-1, AS923-2, AS923-3, IN865-867, CN470-510 Note: optional, to be done in factory configuration
------------------------	--

Clamp-on Current Transformer Parameter

Rated Primary Current	100A, 50Hz – 60Hz
Rated Secondary Current	33.33mA
Saturation Current	≥150A
Ratio	3000:1
Load Resistance	10Ω
Accuracy	1% (1A– 150A)
Electrical Strength	3000V
Case Material	Flame Retardant Grade 94-V0 UL Material
Environmentally Friendly	ROHS compliant
Operating Temperature	-40 °C – 85 °C

Physical Properties

Dimensions	Main body: 112mm (L) x 88.19mm (W) x 32mm (H) Sensor: 33mm (L) x 28.5mm (W) x 43.5mm (H)
Main body Weight	About 141g
Sensor Weight	About 70.1g
Sensor External Wiring Length	R718N115:D About 900mm R718N115DE: About 1200mm (detachable cable)
Ambient Temperature Range	-20°C – 55°C
Storage Temperature Range	-40°C – 85°C
Ambient Humidity Range	<90% RH (No condensation)
Mounting	Screw / Magnet