

# Datasheet

Version 1.0

***NETVOX TECHNOLOGY CO., LTD.***

**Add.: No. 21-1 Sec. 1 Chung Hua West Road, Tainan, Taiwan**

**Tel.: +886-6-2617641, 2654878**

**Fax.: +886-6-2656120**

**<http://www.netvox.com.tw>**

**Copyright©Netvox Technology Co., Ltd.**

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology.

The specifications are subjected to change without prior notice.

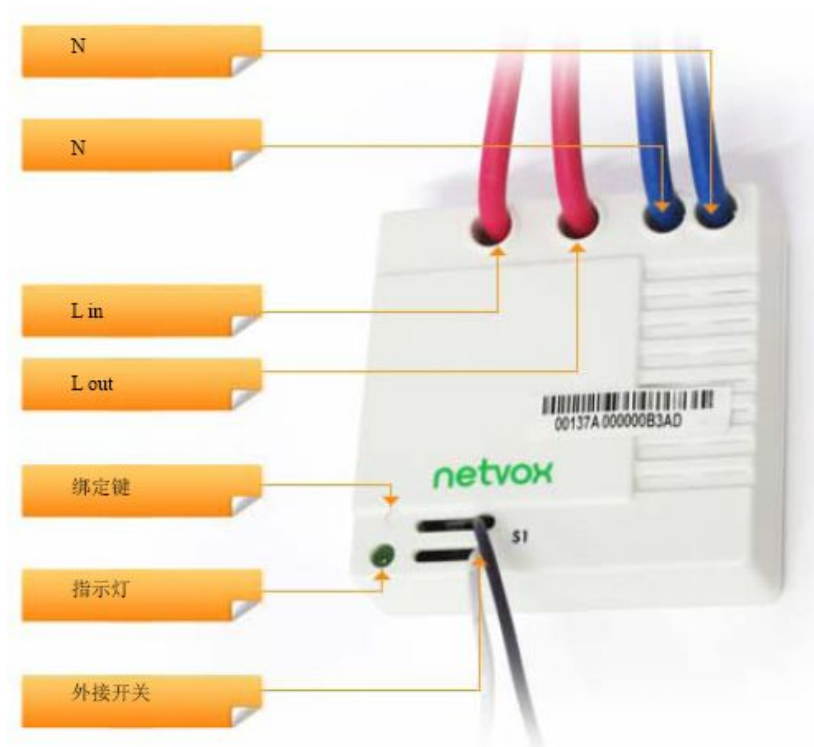


图 1 Z805B 外观效果图

## Introduction

Z805B is a wireless AC power switch device with power/energy/current/voltage consumption monitoring feature. In the network, Z805B functions as a router device in the network which permit join other devices to the network. The device can be paired with a ZigBee enabled on/off remote device to control. Netvox has its proprietary energy management system such as ZiG-BUTLER software to view power or current consumption.

### Application Field

- Home automation or commercial indoor smart switch

## Hardware Version

V0.1

## Technical Parameter

## Electric

Input voltage	100~240VAC
Input current	16A
Power Frequency	50~60Hz
Energy report duration	10 seconds
Load property	16A/250VAC/4000W (Resistance load)
	1.5HP/240VAC (Motor load)
	8A/220VAC/1760VA (Inductive Load COSΦ=0.4)
Standby mode	<1W (13mA@230V/50Hz)
Energy measurement accuracy	<±1%
Energy measurement range	100mA~16A, 85~264VAC,
Relay type	Magnetic Relay
Terminal connection Spec.	100,000 times (Resistance load)

## Frequency

Frequency	2.4~2.4835 GHz
Channel	16 channels (ISM 11th~26th channel)
TX power	7dBm (Max.)
Rx sensitivity	-101dBm
Antenna type	Build-in antenna
Communication rang	120 米 (line-of-sight)
Data transfer rate	250Kbps
Spread technique	DSSS (O-QPSK)

## Physical

Dimension	51mm×51mm×17mm
Weight	65g
Working Humidity.	5%~85%RH
Working Temp.	-10℃~50℃
Storage Temp.	-40℃~85℃