



ZigBee™- Scene Selector & Mode Selector

User Manual

Scene Selector & Mode Selector

Model: ZB02J

20140213

FW V1.0

HW V5.0

Table of Contents

1. Introduction.....	3
2. Product Appearance.....	4
3. Specification.....	5
4. Installation Diagram.....	5
5. Setting up ZB02J.....	6
5-1. Turn On ZB02J.....	6
5-2. Join the ZigBee Network.....	6
5-3. Control.....	6
5-4. Sleeping Mode.....	7
5-5. Battery.....	7
5-6. Restore to Factory Setting.....	7
6. Home Automation Clusters for ZB02J.....	8
7. Important Maintenance Instructions.....	10


1. Introduction

Netvox ZB02J, a scene selector & mode selector, acts as an End Device in ZigBee network. It does not perform permit-join function as a coordinator or a router for other devices to join the network. It supports Add Group/ Store Scene/ Recall Scene features and can be configured for 3 scene controls. It also supports Mode control of the ZigBee applications such as Netvox ZiG-BUTLER.

What is ZigBee?

ZigBee is a short range wireless transmission technology based on IEEE802.15.4 standard and supports multiple network topologies such as point-to-point, point-to-multipoint, and mesh networks. It is defined for a general-purpose, cost-effective, low-power-consumption, low-data-rate, and easy-to-install wireless solution for industrial control, embedded sensing, medical data collection, smoke and intruder warning, building automation and home automation, etc.

2. Product Appearance

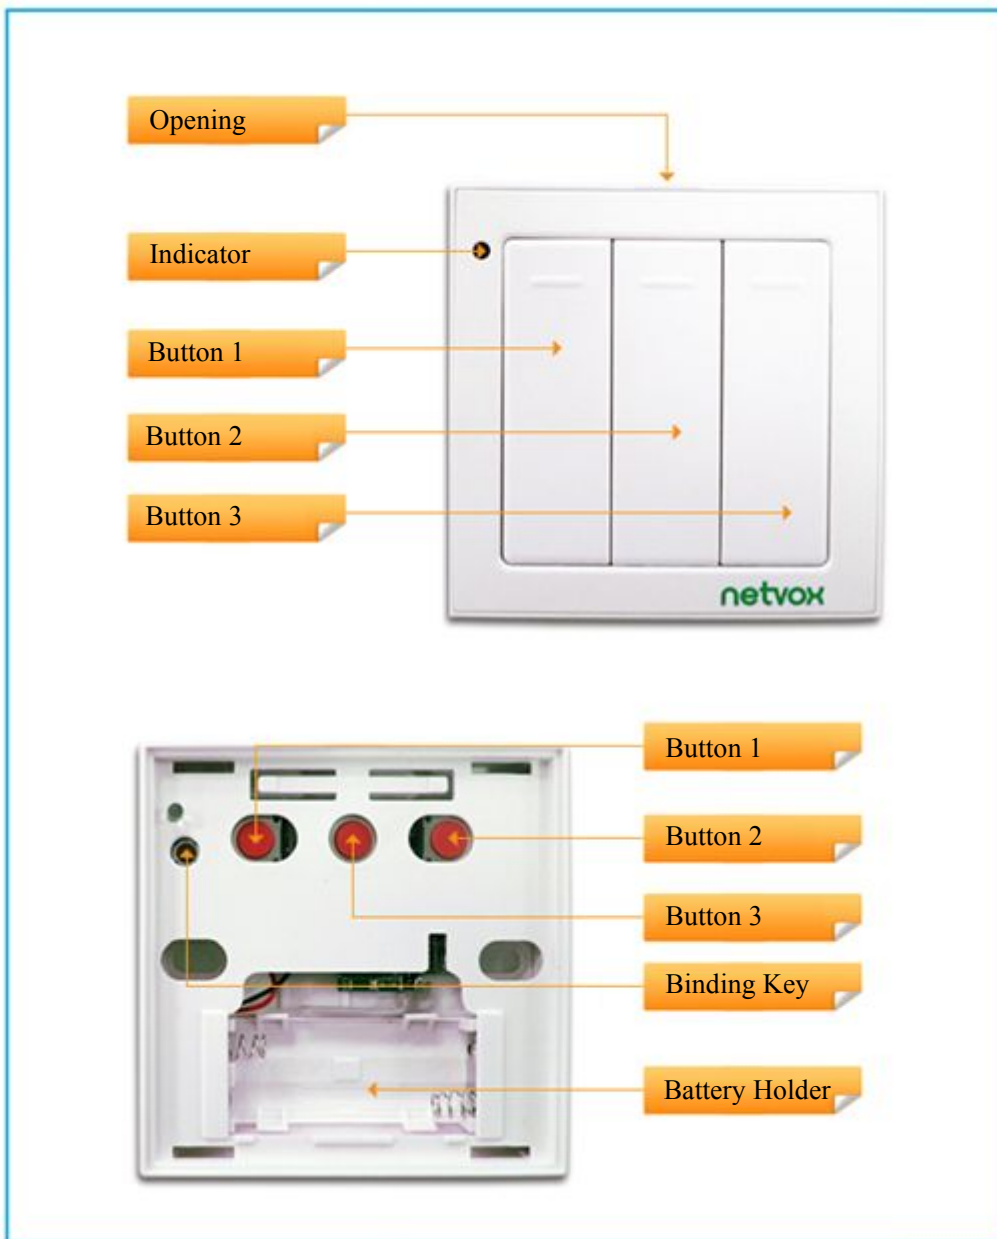

3. Specification

- Fully IEEE 802.15.4 compliant
- Utilizes 2.4GHz ISM band; up to 16 channels
- Power supply: 2 x AAA batteries.
- Operating consumption: $\leq 40\text{mA}$
- Standby consumption: $\leq 1\mu\text{A}$
- Up to 70 meters wireless transmission range in non-obstacle space
- Easy installation and configuration

4. Installation Diagram



5. Setting up ZB02J

5-1. Turn On ZB02J

For power saving, ZB02J is designed to get into **sleeping mode** when there is no activity for 2 minutes.

To manually turn on ZB02J, press the *Binding Key* **once**.

- When ZB02J is first time used or after resetting → it will try to join the network.
- When ZB02J is in a ZigBee network → it will send out the device data, like IEEE address/Network address, and the indicator will flash **5 times**. ZB02J will be activated for 2 minutes.
- When ZB02J was in a ZigBee network, but by any change it is offline → it will start to rejoin the ZigBee network.

5-2. Join the ZigBee Network

After ZB02J is turned on, it will search for an existing ZigBee network and send a request to join the network automatically. While ZB02J is under the coverage from a coordinator or a router whose **permit-join feature is enabled**, ZB02J will be permitted to join the network.

Step1. Enable the permit-join function (valid for 60 seconds) of a coordinator or a router (please refer to the user manual of the coordinator or the router to enable the permit-join feature).

Step2. Turn on ZB02J. It will start to search and join the network.

Step3. The indicator will flash **5 times** after it is joined successfully. Otherwise, the indicator will not flash.

ZB02J will try to join the network for 1 minute. Please try step1~3 again when it is failed to join the network.

5-3. Control

A. Scene Selector

i. Store Scene

After ZB02J join a network, users can add the device, like ZC06A, into a group/scene using the following steps:

Step1. Identify the device which you would like to add.

Step2. Press and hold button 1/ 2/ 3 for 3 seconds. The indicator will flash **once**.

Step3. Release the button and then press the *Binding Key* within 2 seconds.

Step4. The indicator flashes **5 times** after the binding is completed; otherwise, it will flash **10 times**.

To remove the device from the group/scene, do the above steps again.

ii. Recall Scene

After store scene, users can press the button 1/ 2/ 3 to recall scene.

B. Mode Selector

Users are able to configure the Mode control through ZigBee applications such as Netvox ZiG-BUTLER.

Related cluster: 0xFE60

5-4. Sleeping Mode

ZB02J is designed to go into sleeping mode for power-saving in some situations:

- A. While the device is in the network → the sleeping period is 5 minutes; it will wake up every 5 minutes to keep online.
- B. When it doesn't find a network to join → ZB02J will go to sleeping mode. It will wake up every 15 minutes to search a network to join.
- C. Once ZB02J was joined to a network and by any chance the network is no longer existed or the device is out of the network → ZB02J will wake up every 15 minutes to find the network it joined before.

It never keeps in sleeping mode and continues to find out a network every 15 minutes. This condition would consume up to 30 times power spending compared to normal-operating status. To prevent this unwanted power consumption, we recommend that users remove the batteries to power off the device.

5-5. Battery

When the operating voltage is lower than 2.4V, the indicator will flash **once**. ZB02J will send a low-power report to the ZigBee network.

5-6. Restore to Factory Setting

To restore it to factory setting, please follow the steps:

- Step1. Remove the batteries to power off ZB02J.
- Step2. Press and hold the *Binding Key*, then power on ZB02J.
- Step3. The indicator will generate flashes, and the restore is completed.

6. Home Automation Clusters for ZB02J

A cluster is a set of related attributes and commands which are grouped together to provide a specific function. A simple example of a cluster would be the On/Off cluster which defines how an on/off switch behaves. This table lists the clusters which are supported by ZB02J.

1.End Point(s) : ZB02J : 0x01 , 0x02 ,0x03

2.Device ID : Scene Selector (0x0004)

3.EndPoint Cluster ID

Server side	Client side
Basic (0x0000)	
Power Configuration(0x0001)	
Identify (0x0003)	Groups(0x0004)
Commissioning (0x0015)	Scenes(0x0005)
Poll Control(0x0020)	
Diagnostics(0x0B05)	

This lists the attributes of the basic information.

Attributes of the Basic Information

Identifier	Name	Type	Range	Access	Default	Mandatory / Optional
0x0000	<i>ZCLVersion</i>	Unsigned 8-bit integer	0x00 – 0xff	Read only	0x03	M
0x0001	<i>ApplicationVersion</i>	Unsigned 8-bit integer	0x00 – 0xff	Read only	0x1E	O
0x0002	<i>StackVersion</i>	Unsigned 8-bit integer	0x00 – 0xff	Read only	0x33	O
0x0003	<i>HWVersion</i>	Unsigned 8-bit integer	0x00 – 0xff	Read only	0x28	O
0x0004	<i>ManufacturerName</i>	Character string	0 – 32 bytes	Read only	netvox	O
0x0005	<i>ModelIdentifier</i>	Character	0 – 32	Read only	ZB02JE3ED	O

		string	bytes			
0x0006	<i>DateCode</i>	Character string	0 – 16 bytes	Read only	-	O
0x0007	<i>PowerSource</i>	8-bit Enumeration	0x00 – 0xff	Read only	0x03	M
0x0012	<i>DeviceEnabled</i>	Boolean	0x00 – 0x01	Read/write	0x01	O

7. Important Maintenance Instructions

- Please keep the device in a dry place. Precipitation, humidity, and all types of liquids or moisture can contain minerals that corrode electronic circuits. In cases of accidental liquid spills to a device, please leave the device dry properly before storing or using.
- Do not use or store the device in dusty or dirty areas.
- Do not use or store the device in extremely hot temperatures. High temperatures may damage the device or battery.
- Do not use or store the device in extremely cold temperatures. When the device warms to its normal temperature, moisture can form inside the device and damage the device or battery.
- Do not drop, knock, or shake the device. Rough handling would break it.
- Do not use strong chemicals or washing to clean the device.
- Do not paint the device. Paint would cause improper operation.

Handle your device, battery, and accessories with care. The suggestions above help you keep your device operational. For damaged device, please contact the authorized service center in your area.

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

1. Use the product in the environment with the temperature between -10°C and 50°C.

For the following equipment:

CE 0700

Is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC,
The equipment was passed. The test was performed according to the following European standards:

EN 301 489-1 V1.9.2: 2011-09

ETSI EN 301 489-17 V2.1.1: 2009-05

ETSI EN 300 328 V1.7.1:2006-10

EN62311:2008

EN 60950-1:2006+A11:2009+A1:2010+A12:2011

**CAUTION
RISK OF EXPLOSION IF BATTERY IS REPLACED
BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING
TO THE INSTRUCTIONS**